


## Insulated Blade Terminals



ITEM NO	Dimension(mm)					Color	Specification
	B	L	F	H	D?		
DBV 1.25-10	2.3	20.0	10.0	10.0	4.3	● Red	Terminal material: red copper conductor section: 0.5-1.5 mm <sup>2</sup> (A.W.G: 22-16) Max Current: I max = 19A Thickness: 0.7mm
DBV 1.25-11	3.0	21.0	11.0				
DBV 1.25-14	3.0	24.0	14.0				
DBV 1.25-18	2.2	28.0	18.0				
DBV 2-9	2.4	19.0	9.0	10.0	4.9	● Blue	Terminal material: red copper conductor section: 1.5-2.5 mm <sup>2</sup> (A.W.G: 16-14) Max Current: I max = 27A Thickness: 0.8mm
DBV 2-14S	2.4	24.0	14.0				
DBV 2-14L	3.0	24.0	14.0				
DBV 2-18	2.2	28.0	18.0				
DBV 5.5-10	2.8	22.5	10.0	13.0	7.2	● Yellow	Terminal material: red copper conductor section: 4-6 mm <sup>2</sup> (A.W.G: 12-10) Max Current: I max = 48A
DBV 5.5-14	4.5	26.5	14.0				
DBV 5.5-18	4.5	30.5	18.0				
DBV 8-14	6.0	30.5	14.0	15.0	5.6	● Red	Thickness: 1.0mm

## Non-Insulated Blade Terminals

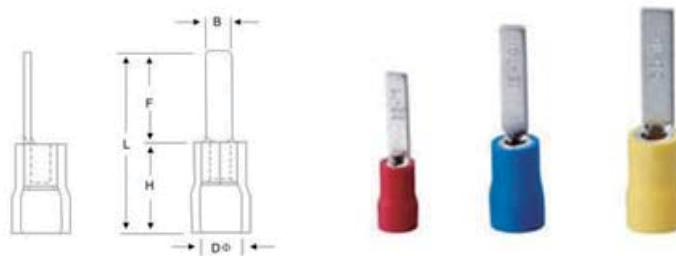

ITEM NO	Dimension(mm)						Specification
	B	L	F	H	D	D	
DBN 1.25-10	2.3	14.8	10.0	4.8	3.4	1.7	terminal material: red copper conductor section: 0.5-1.5mm <sup>2</sup> ( A.W.G: 22-16) Max current: I max= 19A thickness:0.7mm
DBN 1.25-11	3.0	15.8	11.0				
DBN 1.25-14	3.0	18.8	14.0				
DBN 1.25-18	2.2	22.8	18.0				
DBN 2-9	2.8	13.8	9.0	4.8	4.1	2.3	terminal material: red copper conductor section: 1.5-2.5mm <sup>2</sup> ( A.W.G: 16-14) Max current: I max= 27A thickness:0.8mm
DBN 2-14S	2.4	18.8	14.0				
DBN 2-14L	3.0	18.8	14.0				
DBN 2-18	2.2	22.8	18.0				
DBN 5.5-10	2.8	14.8	10.0	6.0	5.6	3.4	terminal material: red copper conductor section: 4-6mm <sup>2</sup> ( A.W.G: 12-10) Max current: I max= 48A thickness:1.0mm
DBN 5.5-14	4.5	21.0	14.0				
DBN 5.5-18	4.5	23.0	18.0				
DBN 8-14	6.0	22.5	14.0	8.5	7.2	4.5	Max current: I max= 62A thickness:1.2mm
DBN 14-16	6.0	27.0	16.0	11.0	9.0	6.5	Max current: I max= 88A thickness:1.5mm
DBN 22-17	7.0	29.0	17.0	12.0	11.5	7.7	Max current: I max= 115A thickness:1.7mm