



## Insulated Spade Terminals



ITEM NO	Bolt No.	Dia of Bolt	Dimension(mm)					Color	Specification
		d2(mm)	B	L	F	E	D		
SV 1.25-3	#4	3.2	5.7	21.2	6.5	10.0	4.3	● red	Terminal Material: Red Copper cross section:0.5~1.5 mm <sup>2</sup> AWG 22-16 I Max=19A thickness: 0.7mm
SV 1.25-3.5S	#6	3.7	5.7	21.2	6.5				
SV 1.25-3.5L	#6	3.7	6.4	21.2	6.5				
SV 1.25-4S	#8	4.3	6.4	21.2	6.5				
SV 1.25-4M	#8	4.3	7.2	21.2	6.5				
SV 1.25-4L	#8	4.3	8.1	21.2	6.5				
SV 1.25-5S	#10	5.3	8.1	21.2	6.5				
SV 1.25-5L	#10	5.3	9.5	21.2	6.5				
SV 1.25-6S	1/4	6.5	9.5	21.2	6.5				
SV 1.25-6L	1/4	6.5	12.0	27.2	11.0				
SV 1.25-8	5/16	8.5	14.0	29.0	12.5				
SV 2-3	#4	3.2	5.7	21.2	6.5	10.0	4.9	● blue	Terminal Material: Red Copper cross section:1.5~2.5 mm <sup>2</sup> AWG 16-14 I Max=27A thickness: 0.8mm
SV 2-3.5S	#6	3.7	5.7	21.2	6.5				
SV 2-3.5L	#6	3.7	6.4	21.2	6.5				
SV 2-4S	#8	4.3	6.4	21.2	6.5				
SV 2-4M	#8	4.3	7.2	21.2	6.5				
SV 2-4L	#8	4.3	8.1	21.2	6.5				
SV 2-5S	#10	5.3	8.1	21.2	6.5				
SV 2-5L	#10	5.3	9.5	21.2	6.5				
SV 2-6S	1/4	6.5	9.5	21.2	6.5				
SV 2-6L	1/4	6.5	12.0	27.2	11.0				
SV 2-8	5/16	8.5	14.0	29.0	12.5				
SV 3.5-3.5	#4	3.7	5.7	24.8	7.0	12.5	6.2	● black	Terminal Material: Red Copper cross section:2.5~4 mm <sup>2</sup> AWG 14-12 I Max=37A thickness: 1.0mm
SV 3.5-4	#8	4.3	8.0	24.8	7.0				
SV 3.5-5S	#10	5.3	8.0	24.8	7.0				
SV 3.5-6L	1/4	6.5	12.0	28.0	12.1				
SV 3.5-6S	1/4	6.5	9.0	25.2	7.5	12.5	6.7	● yellow	Terminal Material: Red Copper cross section:4~6 mm <sup>2</sup> AWG 12-10 I Max=48A thickness: 1.0mm
SV 5.5-3.5	#6	3.7	8.3	25.2	7.5				
SV 5.5-4S	#8	4.3	8.3	25.2	7.5				
SV 5.5-4L	#8	4.3	9.0	25.2	7.5				
SV 5.5-5	#10	5.3	9.0	25.2	7.5				
SV 5.5-6S	1/4	6.5	9.0	25.2	7.5				
SV 5.5-6L	1/4	6.5	12.0	31.2	12.0				
SV 5.5-8	5/16	8.5	14.0	30.0	11.5				

## Non-insulated spade Terminals

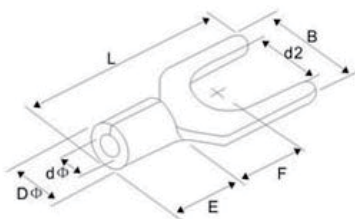

ITEM NO	Bolt No.	Dia of Bolt	Dimension (mm)						Specification
		d2 (mm)	B	L	F	E	D	d	
SNB 1.25-3	#4	3.2	5.7	16	6.5	4.8	3.4	1.7	Terminal Material: Red Copper cross section: 0.5~1.5 mm <sup>2</sup> AWG 22-16 I Max=19A thickness: 0.7mm
SNB 1.25-3.5S	#6	3.7	5.7	16	6.5				
SNB 1.25-3.5L	#6	3.7	6.4	16	6.5				
SNB 1.25-4S	#8	4.3	6.4	16	6.5				
SNB 1.25-4M	#8	4.3	7.2	16	6.5				
SNB 1.25-4L	#8	4.3	8.1	16	6.5				
SNB 1.25-5S	#10	5.3	8.1	16.0	6.5				
SNB 1.25-5L	#10	5.3	9.5	16.0	6.5				
SNB 1.25-6S	1/4	6.5	9.5	16.0	6.5				
SNB 1.25-6L	1/4	6.5	12.0	22.0	11.0				
SNB 1.25-8	5/16	8.5	14.0	23.5	12.5	4.8	4.1	2.3	Terminal Material: Red Copper cross section: 1.5~2.5 mm <sup>2</sup> AWG 16-14 I Max=27A thickness: 0.8mm
SNB 2-3	#4	3.2	5.7	16.0	6.5				
SNB 2-3.5S	#6	3.7	5.7	16.0	6.5				
SNB 2-3.5L	#6	3.7	6.4	16.0	6.5				
SNB 2-4S	#8	4.3	6.4	16.0	6.5				
SNB 2-4M	#8	4.3	7.2	16.0	6.5				
SNB 2-4L	#8	4.3	8.1	16.0	6.5				
SNB 2-5S	#10	5.3	8.1	16.0	6.5				
SNB 2-5L	#10	5.3	9.5	16.0	6.5				
SNB 2-6S	1/4	6.5	9.5	16.0	6.5				
SNB 2-6L	1/4	6.5	12.0	22.0	11.0				
SNB 2-8	5/16	8.5	14.0	23.5	12.5	6.0	5.0	3.0	Terminal Material: Red Copper cross section: 2.5~4 mm <sup>2</sup> AWG 14-12 I Max=37A thickness: 1.0mm
SNB 3.5-3.5	#4	3.7	8.0	18.3	7.0				
SNB 3.5-4	#8	4.3	8.0	18.3	7.0				
SNB 3.5-5S	#10	5.3	8.0	18.3	7.0				
SNB 3.5-6S	1/4	6.5	9.0	19.5	7.5				
SNB 3.5-6	1/4	6.5	12.0	21.5	12.1	6.8	5.6	3.4	Terminal Material: Red Copper cross section: 4~6 mm <sup>2</sup> AWG 12-10 I Max=48A thickness: 1.0mm
SNB 5.5-3.5	#6	3.7	8.3	19.5	7.5				
SNB 5.5-4S	#8	4.3	8.3	19.5	7.5				
SNB 5.5-4L	#8	4.3	9.0	19.5	7.5				
SNB 5.5-5	#10	5.3	9.0	19.5	7.5				
SNB 5.5-6S	1/4	6.5	9.0	19.5	7.5				
SNB 5.5-6L	1/4	6.5	12.0	25.5	12.0				
SNB 5.5-8	5/16	8.5	14.0	24.5	11.5	8.5	7.2	4.5	I Max = 62A
SNB 8-4	#8	4.3	8.0	23.0	7.2				
SNB 8-5	#10	5.3	10.8	23.0	7.2				
SNB 8-6	1/4	6.5	10.8	23.0	7.2				
SNB 8-8	5/16	8.5	14.5	28.0	10.7	11	9.0	5.8	I Max = 88A
SNB 14-6	1/4	6.5	11.0	28.0	10.7				
SNB 14-8	5/16	8.5	14.0	28.0	10.7	12	11.5	7.7	I Max = 115A
SNB 22-6	1/4	6.5	14.0	34.5	9.5				
SNB 22-8	5/16	8.5	14.0	34.5	13.5	12	11.5	7.7	