


TERMINAL CONNECTORS

CABLE LUG

A303 Cable lug AUS

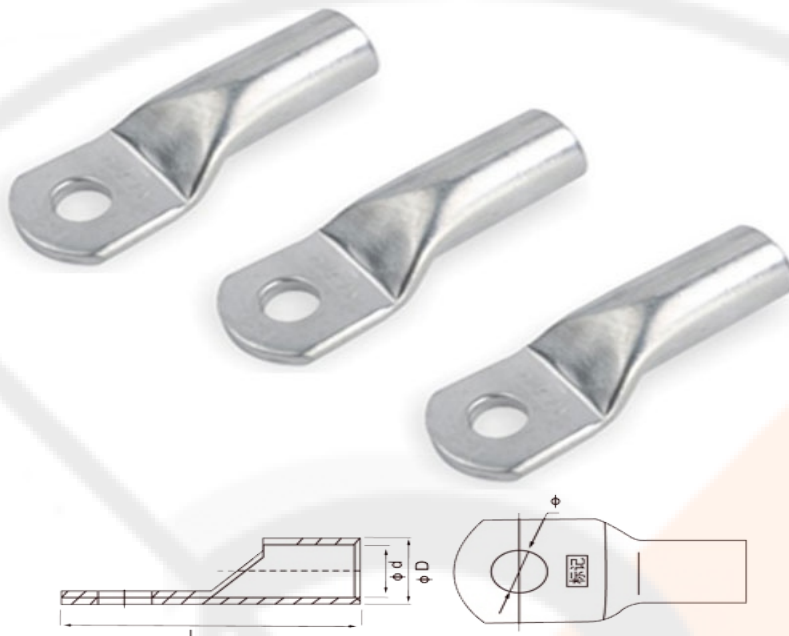

AUS terminals are suitable for the connection of copper conductor section from 1.5 to 1000sqmm. in power cable with electronic equipment, terminals are made of with 99.9% pure copper tube T2 and with Tinned coating.

Working temperature:-55C to 150 C

Type	ϕ	D	d	L
AUS-6	$\phi 5.2, \phi 6.2, \phi 8.2$	5.5	3.8	31.5
AUS-10	$\phi 6.2, \phi 8.2$	6	4.5	34.5
AUS-16	$\phi 6.2, \phi 8.2, \phi 10.5$	8.5	5.5	43.5
AUS-25	$\phi 6.2, \phi 8.2, \phi 10.5$	10	7	48
AUS-35	$\phi 6.2, \phi 8.2, \phi 10.5, \phi 12.5$	12.5	8.2	52
AUS-50	$\phi 8.2, \phi 10.5, \phi 12.5$	14.5	10	64
AUS-70	$\phi 8.2, \phi 10.5, \phi 12.5$	16.5	11.5	68
AUS-95	$\phi 10.5, \phi 12.5$	19	13.5	78
AUS-120	$\phi 12.5, \phi 16.5$	21	15.5	86
AUS-150	$\phi 12.5, \phi 16.5$	23.5	17	94
AUS-185	$\phi 16.5$	25.5	19	101
AUS-240	$\phi 16.5$	29	21.5	111
AUS-300	$\phi 16.5, \phi 20.5$	32	24.5	119
AUS-400	$\phi 16.5, \phi 20.5$	38.5	27.5	140
AUS-500	$\phi 16.5, \phi 20.5$	42	31	150
AUS-630	$\phi 20.5$	44	34.5	160
AUS-800	$\phi 22.5$	52	40	195
AUS-1000	$\phi 22.5$	58	44	195