

## B312 ANCHOR CLAMP

aANWx.yOY

a= Number of core; AN= Anchor clamp; W= Wedge type; OY=Marks of this clamp.  
x= Min.section of conductor;y=Max.section of conductor

Four Core Anchor clamps are design to anchor self supporting LV.ABC from 2 to 4 cores, the wedge can be self-adjusting. Pilot wires or street lighting conductor are led alongside the clamp.

The self opening is featured by an integrate spring facilities for easily insert the conductor in to the clamp.

### PRODUCT RANGE:

2ANW10.35	2×10-35	4
4ANW10.35	4×10-35	4
2ANW10.35-SS	2×10-35	4
4ANW10.35-SS	4×10-35	4
AN-PA25-FA	2×16-35	3
AN-PA25-SS	2×16-35	4



ANW

### USED MATERIALS:

Hi-conductivity aluminium UV & fire resistant plastic, hot dip galvanized steel stripe.

### VARIANTS:


The product is manufactured and supplied in this form only.

### PACKING:

Standard package for transport. or according to customer requirment.

### STORAGE AND TRANSPORT:

Product don't have and specific requirements on storage. Its is fire-resistan and its not dangerous

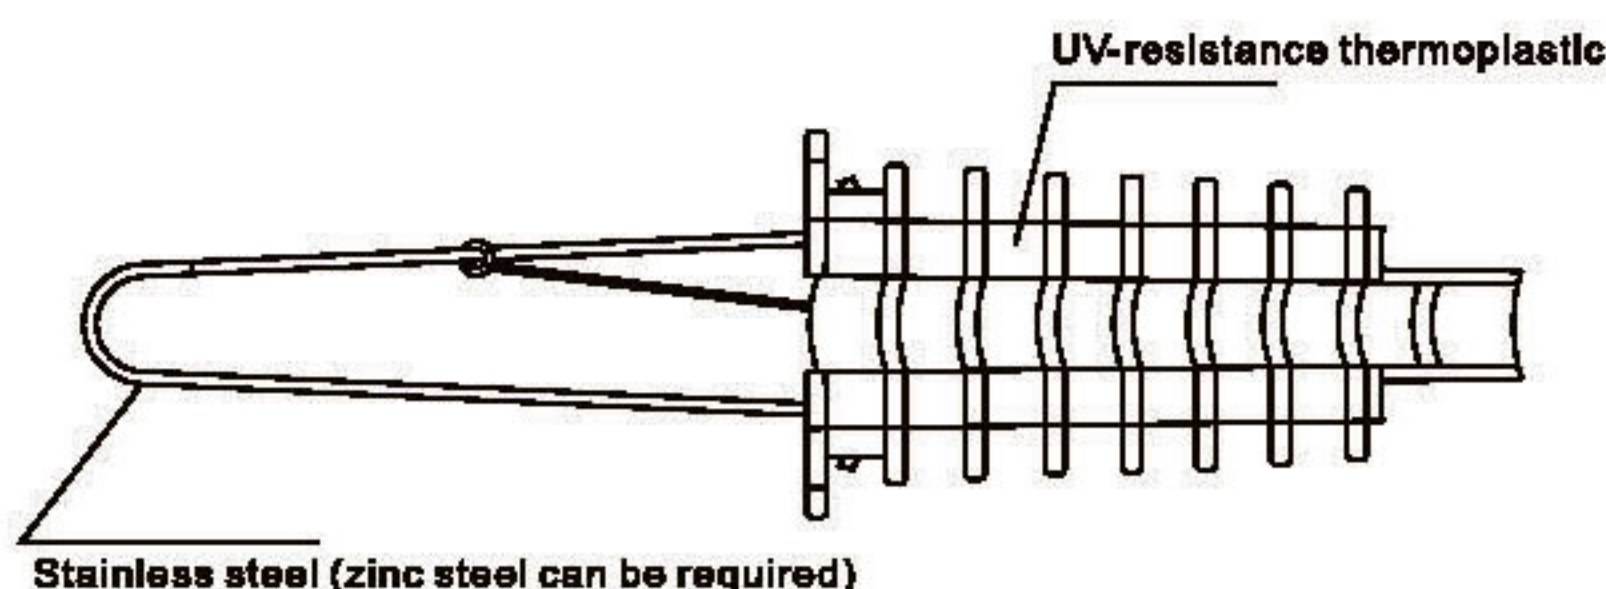

AN-PA  
(AC-PAG)